
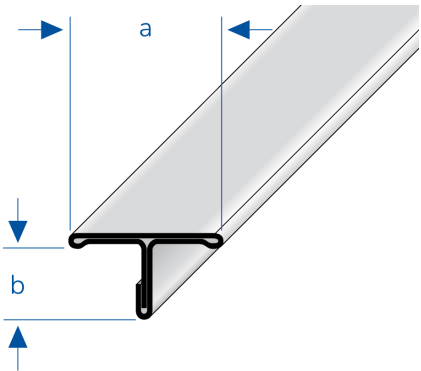



TECHNICAL DATA SHEET

TFE

Description	Separating and cover profile for retrospective installation
Reference	TFE 1400 / TFE 1400-SP / TFE 1400-SF - TFE 2500 / TFE 2500-SP / TFE 2500-SF
Material	Stainless steel (V2A/304)
Surface	Natural
Color	silver / silver high-gloss / silver brushed
Length	250cm
Height (b)	6-7 mm
Width (a)	14/25 mm
Weight	0,124 / 0,221 kg/m
Picture	

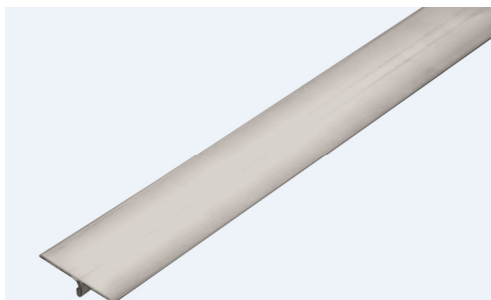

TFE 2500

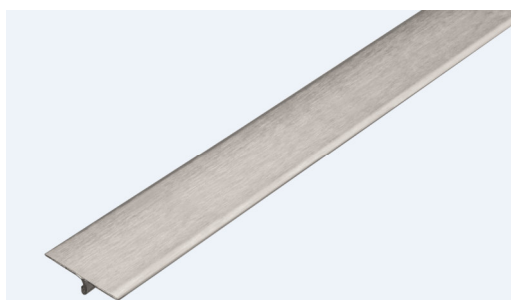

TFE 2500-SF

TECHNICAL DATA SHEET

Stainless steel (V2A/304)

Steel is mechanically very sturdy. It is especially highly resistant to most chemical products or dilute acids and alkalis. Avoid contact with hydrochloric acid or non-alloy steel tools. When cutting stainless steel, make sure the saw blades or cutting discs are new and remove all dust and shavings immediately to prevent patches of corrosion. For elastic junctions, only use neutrally bonding silicone adhesives (to prevent risk of corrosion). For certain cases profiles made of 316 steel are available (with higher resistance to corrosion).

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.