


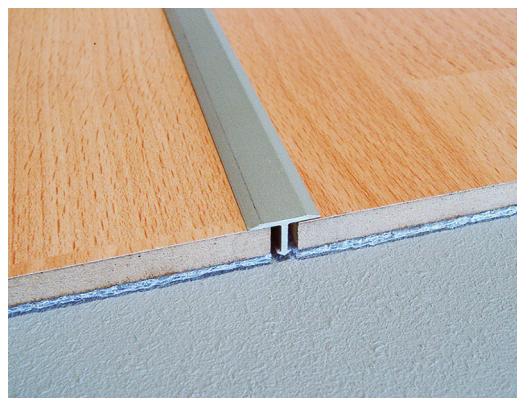
TECHNICAL DATA SHEET

TFA

Description	Separating and cover profile for retrospective installation
Reference	TFA 1400 / TFA 2500
Material	Aluminium
Surface	Natural
Color	Silver
Length	100/250/300 cm
Height	6-7 mm
Width	14/25 mm
Weight	0,065 / 0,110 kg/m
Picture	



TFA 1400



TFA 2500



TECHNICAL DATA SHEET

Aluminium

Aluminium provides a medium degree of mechanical strength. It is sensitive to alkaline materials, e.g. fresh cement can cause bad staining (oxidation marks). Adhesive and grout should always be removed immediately from all visible surfaces using plenty of water. Once oxidation marks have been allowed to appear, it is practically impossible to remove them. High air humidity levels during the joint drying phase can increase this effect.

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.



DURAL GmbH – Südring 11 – D-56412 Ruppach-Goldhausen Tel. +49 (0) 2602/9261-0 Fax +49 (0) 2602/9261-50 info@dural.com
DURAL UK Ltd. – Unit 6a, Wakefield Business Centre, Denby Dale Road, Wakefield, West Yorkshire, WF2 7AZ Tel. 01924 360110 sales@dural.co.uk
DURAL USA, Inc. – 711 N Vernell Rd. – Tunnel Hill, GA 30755 Tel. 800.278.1956 Fax 706 519 0395 mail@dural.com

www.dural.com