




# **TECHNICAL DATA SHEET**

## **DISTE** with insert

Description	Stair nosing profile with anti-slip safety insert for tiled floors
Reference	DISTE 11106 – DISTE 11107 – DISTE 11109 – DISTE 11110 – DISTE 11113
Material insert	Quartz / PVC
Colour insert	Neutral black (06), Charcoal grey (07), Rich brown (09), Putty (10), Mid grey (13)
Material	Stainless steel (V2A/304)
Surface	Natural
Color	silver
Length	250cm
Height	11 mm
Visible width	25 mm
Width insert	13 mm
Weight	0,454 kg/m
Slip resistance class	R 10/ V6
Use	Indoor and outdoor
Picture	with insert 13 mm

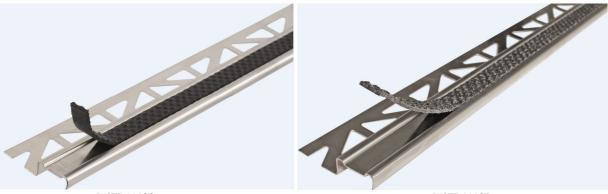

DISTE 11106 DISTE 11107

EN

DURAL Gmbh – Südring 11 – D-56412 Ruppach-Goldhausen Tel. +49 (0) 2602/9261-0 Fax +49 (0) 2602/9261-50 info@dural.com

DURAL UK Ltd. – Unit 6a, Wakefield Business Centre, Denby Dale Road, Wakefield, West Yorkshire, WE2 7AZ Tel. 01924 360110 sales@dural.co.uk

DURAL USA, Inc. – 711 N Varnell Rd. – Tunnel Hill, GA 30755 Tel. 800 278 1956 Fax 706 519 0395 mal@dural.com





### **TECHNICAL DATA SHEET**

#### Stainless steel (V2A/304)

Steel is mechanically very sturdy. It is especially highly resistant to most chemical products or dilute acids and alkalis. Avoid contact with hydrochloric acid or non-alloy steel tools. When cutting stainless steel, make sure the saw blades or cutting discs are new and remove all dust and shavings immediately to prevent patches of corrosion. For elastic junctions, only use neutrally bonding silicone adhesives (to prevent risk of corrosion). For certain cases profiles made of 316 steel are available (with higher resistance to corrosion).

#### **Note**

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.