
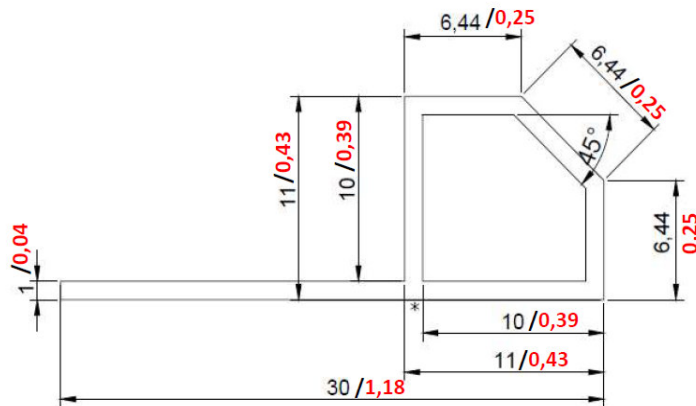


TECHNICAL DATA SHEET

DPDAC/DPDACM 10mm

Description	Profile series with diamond cross-section 45°
Reference	DPDAC 1065 - DPDAC 1080 - DPDACM 1011
Material	Aluminium
Surface	Powder coated
Color	RAL 0006500 Concrete grey RAL 0808005 Sand RAL 9011 Black Matt
Length cm/inches	250/300 - 98,4252/118,11
High mm/inches	10 / 0,3937
Weight	0,164 kg/m
Accessories	Internal corner (-YI) and External Corner (Y)
Picture	

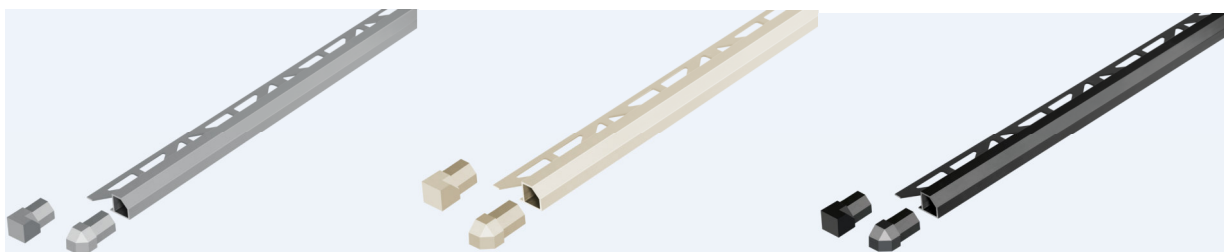

DPDAC 1065

DPDAC 1080

DPDACM 1011



TECHNICAL DATA SHEET

Powder-coated aluminium

This involves powder coating of aluminium usual a special process. This is harder and stronger than other finishes. It is resistant to UV light as well as chemicals and weathering. Visible surfaces may be susceptible to scratches. Use only cleaning agents that do not scour.

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.



DURAL GmbH – Südring 11 – D-56412 Ruppach-Goldhausen Tel. +49 (0) 2602/9261-0 Fax +49 (0) 2602/9261-50 info@dural.com
DURAL UK Ltd. – Unit 6a, Wakefield Business Centre, Denby Dale Road, Wakefield, West Yorkshire, WF2 7AZ Tel. 01924 360110 sales@dural.co.uk
DURAL USA, Inc. – 711 N Varnell Rd – Tunnel Hill, GA 30755 Tel. 800 278 1956 Fax 706 519 0395 mail@dural.com

www.dural.com