
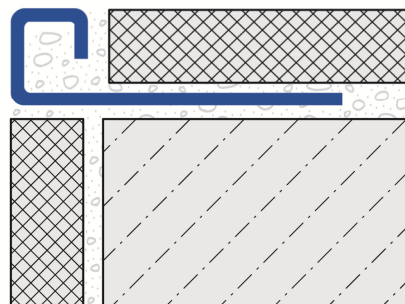



TECHNICAL DATA SHEET

DPE

Description	Edge trim for walls and floors
Reference	DPE 90 / DPE 110 / DPE 125 DPE 90-SP / DPE 110-SP / DPE 125-SP
Material	Stainless steel (V2A/304)
Surface	Natural / High-gloss polished
Color	Silver
Length	250 cm
High	9 - 11 - 12,5 mm
Visible width	8 mm
Accessories	Internal and external corner (-Y)
Picture	

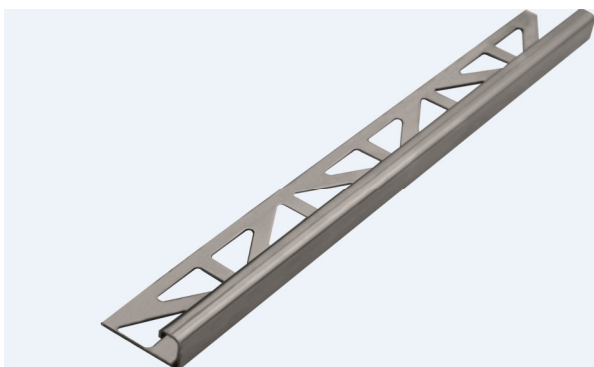

Natur

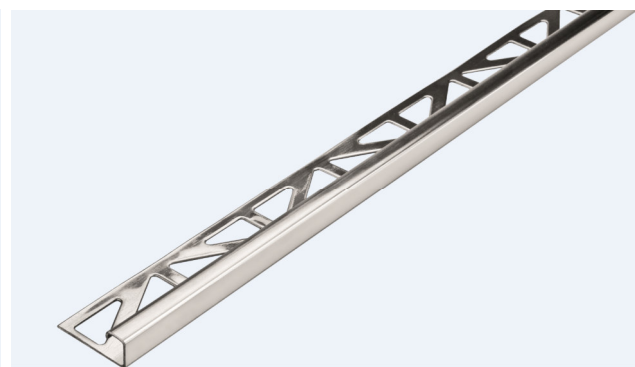

High-gloss polished



TECHNICAL DATA SHEET

Stainless steel (V2A/304)

Steel is mechanically very sturdy. It is especially highly resistant to most chemical products or dilute acids and alkalis. Avoid contact with hydrochloric acid or non-alloy steel tools. When cutting stainless steel, make sure the saw blades or cutting discs are new and remove all dust and shavings immediately to prevent patches of corrosion. For elastic junctions, only use neutrally bonding silicone adhesives (to prevent risk of corrosion). For certain cases profiles made of 316 steel are available (with higher resistance to corrosion).

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.



DURAL GmbH – Südring 11 – D-56412 Ruppach-Goldhausen Tel. +49 (0) 2602/9261-0 Fax +49 (0) 2602/9261-50 info@dural.com
DURAL UK Ltd. – Unit 6a, Wakefield Business Centre, Denby Dale Road, Wakefield, West Yorkshire, WF2 7AZ Tel. 01924 360110 sales@dural.co.uk
DURAL USA, Inc. – 711 N Vernell Rd. – Tunnel Hill, GA 30755 Tel. 800.278.1956 Fax 706 519 0395 mail@dural.com

www.dural.com