
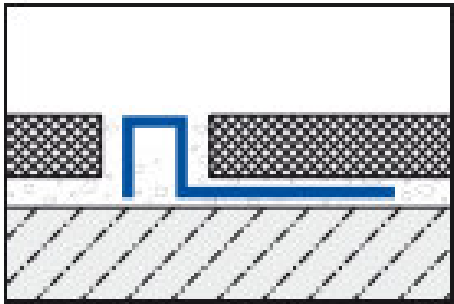


TECHNICAL DATA SHEET

DPM

Description	Edge trim for walls and floors
Reference	DPM 90 / DPM 110 / DPM 125 DPM 90-SP / DPM 110-SP / DPM 125-SP DPM 90-SC / DPM 110-SC / DPM 125-SC
Material	Brass
Surface	Natural / High-gloss / Chrome
Color	Yellow / yellow high-gloss / silver chrome
Length	250 cm
High	9 - 11 - 12,5 mm
Visible width	8 mm
Accessories	Internal and external corner (-Y)
Picture	

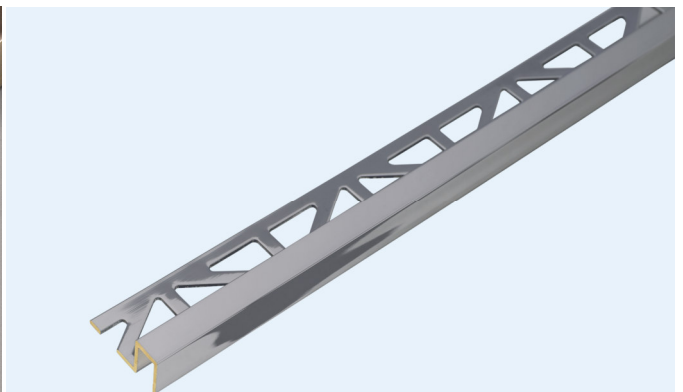

TECHNICAL DATA SHEET

Brass

Brass is mechanically very sturdy. It is resistant to most chemicals likely to come in contact with tiled floors. However, brass oxidises (forms a patina) in air. If used in damp rooms or in connection with corrosive materials, this oxidation can be more serious and marks may even appear on the visible surfaces. Brass profiles can, if necessary, be polished using special cleaning paste and may look coppery thereafter. For elastic junctions, only use neutrally bonding silicone adhesives (to prevent risk of corrosion).

Brass chrome

Chrome is mechanically sturdy, but avoid all contact with cement remover in order to prevent corrosion.

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.