




# **TECHNICAL DATA SHEET**

## **DSA**

Description	L-shaped edge trim for walls and floors with a narrow visible edge
Reference	DSA 20 / DSA 30 / DSA 45 / DSA 60 / DSA 80 / DSA 90 / DSA 100 / DSA 110 / DSA 125 DSA 150 / DSA 165 / DSA 185 / DSA 200 / DSA 220 / DSA 250 / DSA 300
Material	Aluminium
Surface	Natural
Color	Silver
Length	100 cm : only in 6-8-9-10-11-12,5-15 mm Height 250 cm : all Height 300 cm : only in 8-9-10-11-12,5-15 mm Height
Height	2-3-4,5-6-8-9-10-11-12,5-15-16,5-18,5-20-22-25-30 mm
Visible Width	3 mm
Picture	Rounded inside: Height: 4.5/6/ 8/9/10/11/ 12.5/15 mm  The rounded profiles will be replaced by the angular ones in the future

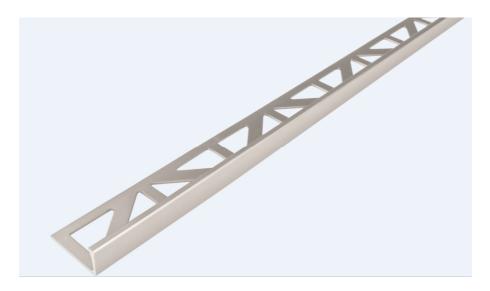







## **TECHNICAL DATA SHEET**

### <u>Aluminium</u>

Aluminium provides a medium degree of mechanical strength. It is sensitive to alkaline materials, e.g. fresh cement can cause bad staining (oxidation marks). Adhesive and grout should always be removed immediately from all visible surfaces using plenty of water. Once oxidation marks have been allowed to appear, it is practically impossible to remove them. High air humidity levels during the joint drying phase can increase this effect.

#### **Note**

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.