
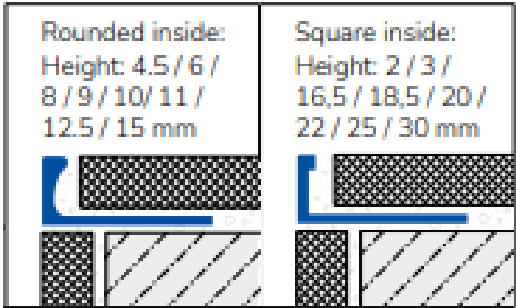


TECHNICAL DATA SHEET

DSAE-G

Description	L-shaped edge trim for walls and floors with a narrow visible edge
Reference	DSAE 30-G / DSAE 45-G / DSAE 60-G / DSAE 80-G / DSAE 90-G / DSAE 100-G / DSAE 125-G / DSAE 150-G
Material	Aluminium
Surface	Anodised
Color	Gold
Length	250 cm
Height	3-4,5- 6-8-9-10-12,5-15 mm
Visible Width	3 mm
Picture	 <p>The rounded profiles will be replaced by the angular ones in the future</p>

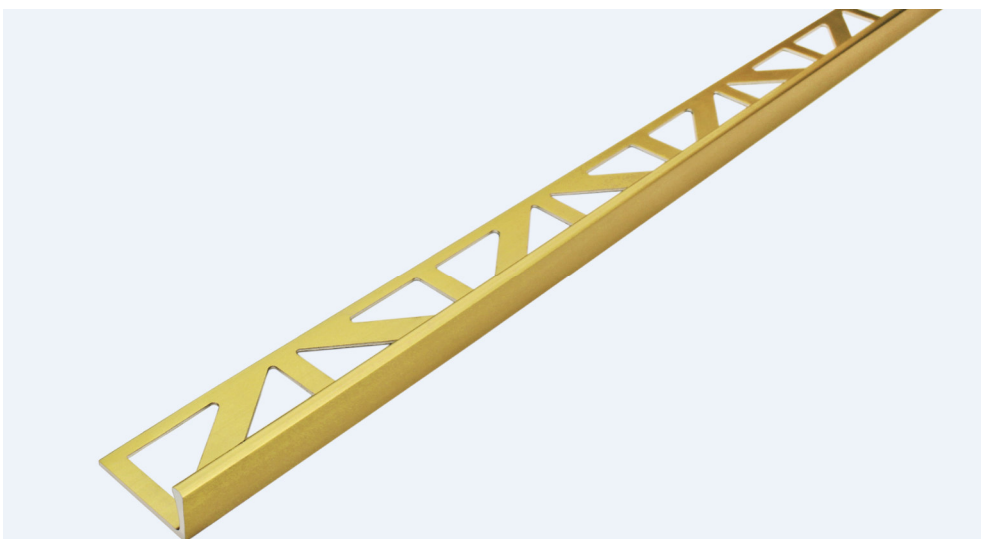

TECHNICAL DATA SHEET

Anodised aluminium

Anodisation is a special finish that improves the look of aluminium profiles. The anodised surface is susceptible to scratches and may become faded, particularly due to the effect of alkaline building products. Contact with fresh cement can cause surface corrosion. Adhesive and grout should always be removed immediately from all visible surfaces using plenty of water. Once oxidation marks have been allowed to appear, it is practically impossible to remove them. Use only cleaning agents with neutral pH that do not scour. Make sure that good room ventilation is provided, especially when joining in combination with high-gloss anodised profiles, in order to achieve fast curing of the joints. This also reduces the alkaline potential of the cement (lowers the pH), thereby preventing any possible damage to the anodised surface.

Note

The suitability for use in terms of mechanical and chemical resistance must always be checked in each individual case. When installing and grouting our metal profiles, the adhesive and grouting materials must be removed immediately with clean water and a soft sponge to prevent damage due to corrosion of the profile. Do not use acidic (e.g. cement fog remover) or alkaline cleaning agents in combination with all metal profiles. Clean with clean water and wipe with a dry linen cloth.